

ISOLATION VERIFICATION CONTROL

HMLI005



Hummingbird
Electronics

ISOLATE YOUR VEHICLE

ISOLATION VERIFICATION CONTROL

HMLI005

Create a safer work environment by keeping your employees safe from harm.

The Hummingbird Isolation Verification Control gives a visual readout of your vehicle's true isolation state before you commence any electrical work, giving you peace of mind.




Look at the benefits:

- Dual pole isolation verification
- Output for remote isolation indicator
- Voltage status indication
- Over/under voltage warning and voltage control interlock
- Available for 12 or 24 volt vehicles
- Isolation voltage drop and open circuit protection
- Configure for starter motor or battery isolation
- Remote live testing with bonnet down

ISOLATION VERIFICATION CONTROL



Clearly-visible status indication...

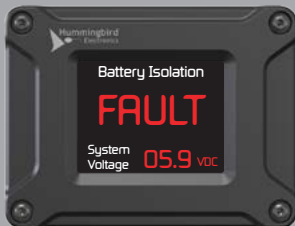

The Isolation Verification Control aims to deliver a safer working environment for your employees by verifying the true isolation state of a vehicle before any electrical work commences on it.


You'll have peace of mind knowing that accurate monitoring is keeping your employees safer.

The device measures the difference between the isolator battery and machine side and then determines

if there is a voltage drop to capture isolator internal connection failures.

In the event the machine's isolator is turned off while the machine is running, the isolation control will measure the voltage drop between the battery and the machine and activate a warning led/alarm and with a 20 second delay interlock relay to cut out the ignition or start solenoid, depending on your requirements.

Part number	HMLI005
Input voltage	9 - 32V
Weight	208g
Dimensions (H x L x W)	76 x 135 x 100mm

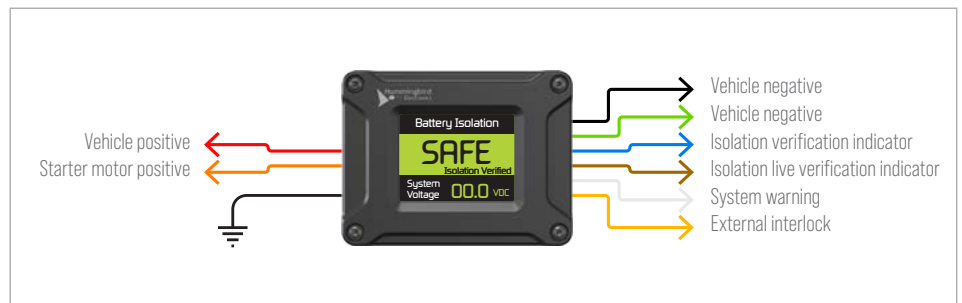

Visit hmbe.com.au/isolation-verification-control for more information

